




## ● Resistive Power Divider

### Features :

Miniaturization, Compact structure, High quality

Small size, High isolation, Low insertion loss

Suitable for the indoor coverage system of cellular mobile communication

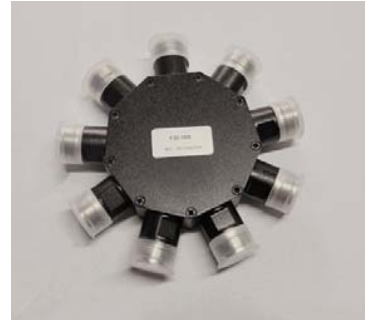

### 仕様 :

Part Number	Frequency Range (MHz)	Way	Insertion Loss (dB)	VSWR	Connector type	Power Handling
LPD-DC/2-2S	DC-2000MHZ	2	$\leq 6.0 \pm 0.5$ dB	$\leq 1.3 : 1$	SMA-F 50Ω	1 Watt
LPD-DC/2-2N	DC-2000MHZ	2	$\leq 6.0 \pm 0.5$ dB	$\leq 1.4 : 1$	N-F 50Ω	2 Watt
LPD-DC/2-3N	DC-2000MHZ	3	$\leq 9.5 \pm 0.5$ dB	$\leq 1.4 : 1$	N-F 50Ω	2 Watt
LPD-DC/2-4S	DC-2000MHZ	4	$\leq 12 \pm 0.5$ dB	$\leq 1.3 : 1$	SMA-F 50Ω	1 Watt
LPD-DC/2-5N	DC-2000MHZ	5	$\leq 14 \pm 0.5$ dB	$\leq 1.4 : 1$	N-F 50Ω	2 Watt
LPD-DC/3-2S	DC-3000MHZ	2	$\leq 6 \text{ dB} \pm 0.4$ dB	$\leq 1.1 : 1$	SMA-F 50Ω	5 Watt
LPD-DC/3-3N	DC-3000MHZ	3	$\leq 9.5 \pm 0.8$ dB	$\leq 1.5 : 1$	N-F 50Ω	2 Watt
LPD-DC/3-5N	DC-3000MHZ	5	$\leq 14 \pm 1.2$ dB	$\leq 1.4 : 1$	N-F 50Ω	2 Watt
LPD-DC/6-2S	DC-6000MHZ	2	$\leq 6.0 \pm 0.9$ dB	$\leq 1.4 : 1$	SMA-F 50Ω	5 Watt
LPD-DC/900-15N	DC-900MHZ	15	$\leq 23.5 \pm 1.6$ dB	$\leq 1.3 : 1$	N-F 50Ω	1 Watt

